

Kalmar arkos

The ARKOS models are radiators/towel warmers created with 25 mm diam. vertical tubular steel elements.

ARKOS is available in single and double version, both versions can be supplied with one or two "maniglione"

In models with height less than 140cm the "maniglione" is placed at the centre of the height.

ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)

The additional charges are calculated on the base price of RAL 9010.
 C0 Category without any additional charge (RAL 9010)
 C1 Category +10%
 C2 Category +15%
 C3 Category +20%
 RAL colours not included in the colour chart +30%
 Colours according to samples request feasibility and cost estimate
 PLATED finishes NOT available

SUPPORTS

The radiators are supplied with standard supports (code ST) that include wall fixing shelves. On request you can order them with bracket supports permanently welded on the radiators, which must be specified when placing the order and have the following code and cost:

Right side WALL bracket supports (code MD)
 Left side WALL bracket supports (code MS)
 CEILING bracket supports (code SO)

For radiators the prices of bracket supports include the special OB2 or B2M connectors if required

LIMITS

WALL bracket supports **AK - AK2** Max. 17 elements (Max. Length 60,0 cm)
AKD - AK2D NOT available
 CEILING bracket supports **AK - AK2** all sizes
AKD - AK2D Max. 17 elements (Max. Length 60,0 cm)

ACCESSORIES

On this model you can mount, on request, some coloured ceramic rings without any additional charge in price.

PACKING


The cardboard packing box is included in the price of sale of the products, and for the ARKOS model it contains the complete wall fixing kit and the manual vent valve. The support shelves for the radiators MUST NOT be recessed in the wall but must be installed with expansion screws.

CONNECTORS

All ARKOS models are always supplied with "OC1" connectors.
 Should different connectors be required, such connectors must be strictly specified in the order. In the case of "OB2" connectors, the radiator can be equipped with 2 1/8" chrome-plated plugs on the head of the manifolds.


Standard connectors

standard connector always supplied, if not otherwise specified in the order




Custom-made connectors

Connectors available on request WITH additional charge



Custom-made connectors

Connectors available on request WITH additional charge




B2M

Specify "d" and "i"

Connectors on request

Connectors available on request WITHOUT any additional charge

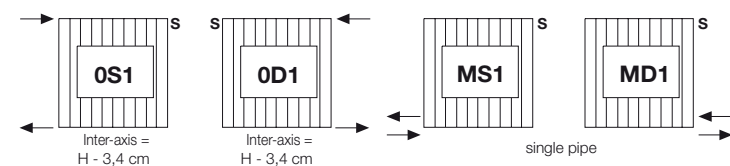

→ = Position of connectors **S** = Air Vent **I** = Inter-axis between connectors

Kalmar arkos

Watt = Kcal/h ÷ 0,860
 Kcal/h = Watt x 0,860

Price for items with White RAL 9010 finish and standard connectors, VAT and transport costs not included

AK

Height		100	110	120	140	150	170	180	190	200
N° elements	Width (cm)	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C
12	42,5	576	628	678	776	824	918	966	1007	1057
13	46,0	624	680	735	841	893	995	1047	1091	1145
14	49,5	672	732	791	906	962	1071	1127	1175	1233
15	53,0	720	785	848	971	1031	1148	1208	1259	1322
16	56,5	768	837	904	1035	1099	1224	1288	1342	1410
17	60,0	816	889	961	1100	1168	1301	1369	1426	1498
18	63,5	864	941	1017	1165	1237	1377	1449	1510	1586
19	67,0	912	994	1074	1229	1305	1454	1530	1594	1674
20	70,5	960	1046	1130	1294	1374	1530	1610	1678	1762

AK2

Height		170	180	190	200
N° elements	Width (cm)	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C
12	42,5	918	966	1007	1057
13	46,0	995	1047	1091	1145
14	49,5	1071	1127	1175	1233
15	53,0	1148	1208	1259	1322
16	56,5	1224	1288	1342	1410
17	60,0	1301	1369	1426	1498
18	63,5	1377	1449	1510	1586
19	67,0	1454	1530	1594	1674
20	70,5	1530	1610	1678	1762

AK2D

Height		170	180	190	200
N° elements	Width (cm)	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C
12	42,5	1314	1379	1444	1508
13	46,0	1424	1494	1564	1634
14	49,5	1533	1609	1684	1760
15	53,0	1643	1724	1805	1886
16	56,5	1752	1838	1925	2011
17	60,0	1862	1953	2045	2137
18	63,5	1971	2068	2165	2263
19	67,0	2081	2183	2286	2388
20	70,5	2190	2298	2406	2514

AKD

Height		100	110	120	140	150	170	180	190	200
N° elements	Width (cm)	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C	Watts ΔT 50°C
12	42,5	830	902	973	1112	1180	1314	1379	1444	1508
13	46,0	900	978	1054	1205	1278	1424	1494	1564	1634
14	49,5	969	1053	1135	1298	1376	1533	1609	1684	1760
15	53,0	1038	1128	1217	1391	1475	1643	1724	1805	1886
16	56,5	1107	1203	1298	1483	1573	1752	1838	1925	2011
17	60,0	1176	1278	1379	1576	1671	1862	1953	2045	2137
18	63,5	1246	1354	1460	1669	1769	1971	2068	2165	2263
19	67,0	1315	1429	1541	1761	1868	2081	2183	2286	2388
20	70,5	1384	1504	1622	1854	1966	2190	2298	2406	2514

SIZES AVAILABLE ON REQUEST: H.130/160