

# Kalmar milano

## VERSIONS AVAILABLE

- WATER
- ELECTRIC

## ADDITIONAL COLOUR CHARGE



The additional charges are calculated on the base price of RAL 9010.  
 C0 Category without any additional charge (RAL 9010)  
 C1 Category +15%  
 C2 Category +20%  
 C3 Category +25%  
 RAL colours not included in the colour chart +30%  
 Colours according to samples request feasibility and cost estimate

## PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit and the manual vent valve

## CONNECTORS

The MILANO model is connected to the heating system with the remote connection Valve and Lockshield (GVR) supplied as an ACCESSORY. To fully understand how to arrange for installation consult the technical section.

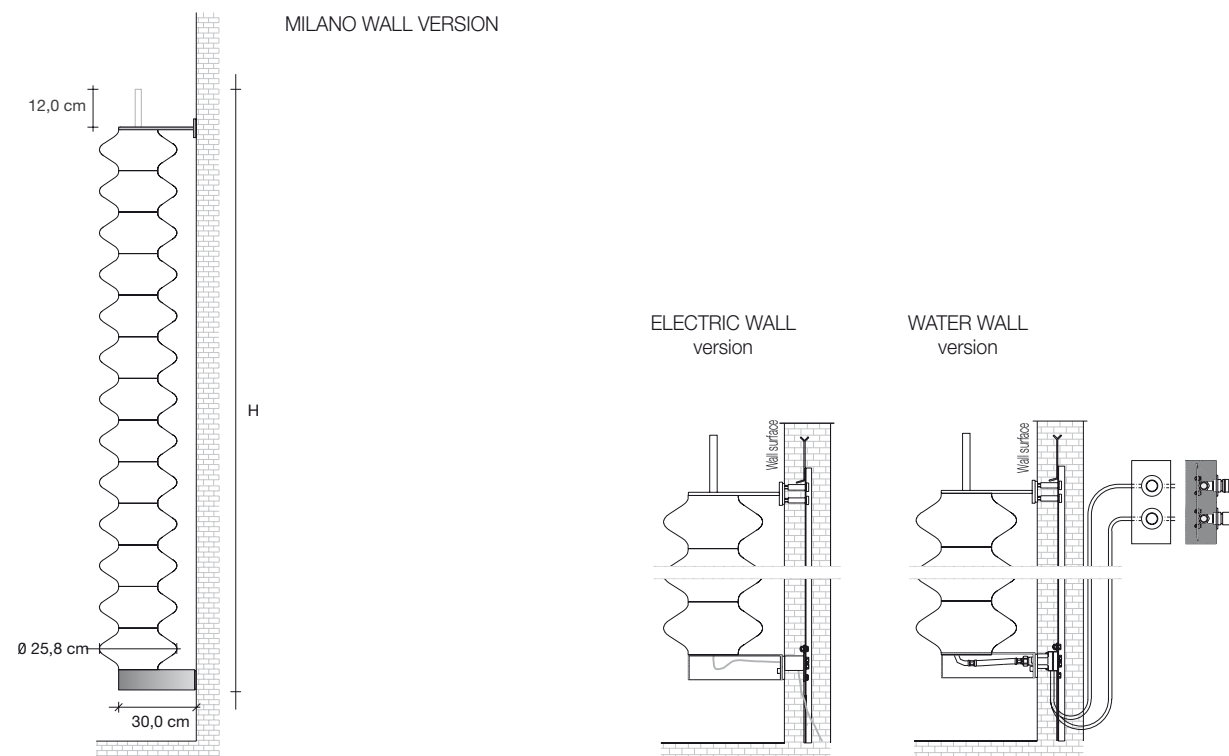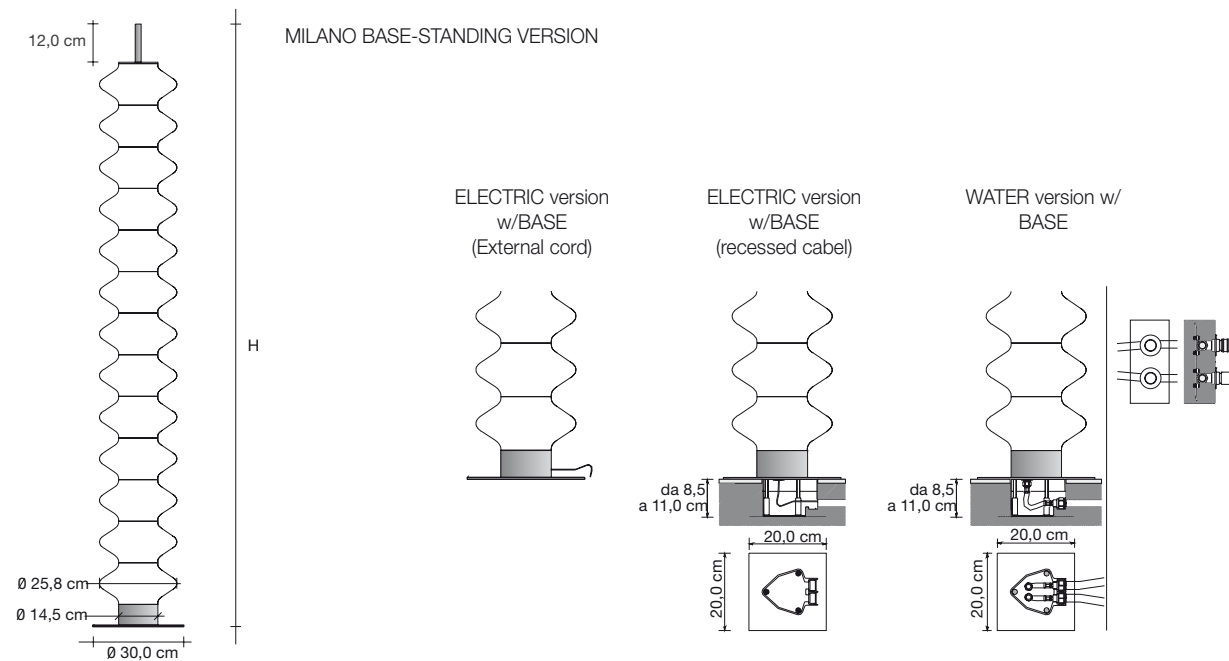

# Kalmar milano



Watt = Kcal/h ÷ 0,860  
Kcal/h = Watt x 0,860

## WATER OPERATING (the prices do not include arrangement for recessing)

Model	H (cm)	L (cm)	Thermal yield Watts ΔT 50°C	FLOOR VERSION (COD. BAIDR)	WALL VERSION (COD. PAIDR)
MLN#170	171,5	25,8	800		
MLN#200	199,0	25,8	934		
MLN#230	227,0	25,8	1079		

## ELECTRIC OPERATING (the prices do not include arrangement for recessing)

Model	H (cm)	L (cm)	Thermal yield Watts ΔT 50°C	FLOOR VERSION (COD. BAELE)	WALL VERSION (COD. PAELI)
MLN#170	171,5	25,8	900		
MLN#200	199,0	25,8	900		
MLN#230	227,0	25,8	1200		


## ELECTRIC OPERATING WITH EXTERNAL CORD (arrangement for recessing is NOT needed for this model)

Model	H (cm)	L (cm)	Thermal yield Watts ΔT 50°C	FLOOR VERSION (COD. BAELE)	WALL VERSION (COD. PAELI)
MLN#170	171,5	25,8	900		
MLN#200	199,0	25,8	900		
MLN#230	227,0	25,8	1200		


## recessed part (for Milano wall and floor version)

Includes the wall recessed part for connection to remote valve assembly (GVR) and the support of the external part of Milano

Model	Description	HYDRAULIC VERSION (COD. IDR)	ELECTRIC VERSION (COD. ELI)
INCMLNBA#	Milano Floor recess		
INCMLNPA#	Milano Wall recess		



Milano Floor recess

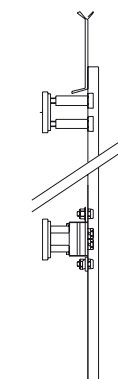

Milano Wall recess

## remote connection valve assembly (GVR)

Includes the complete Valve and Lockshield assembly for remote connection (GVR), can be installed up to a maximum distance of 6 metres from the radiator.

Code	Description	Chrome plated G0
GVR	RECESSED valve and lockshield assembly for remote connection	